


12.5MM WOODLAND OAK

real wood engineered flooring

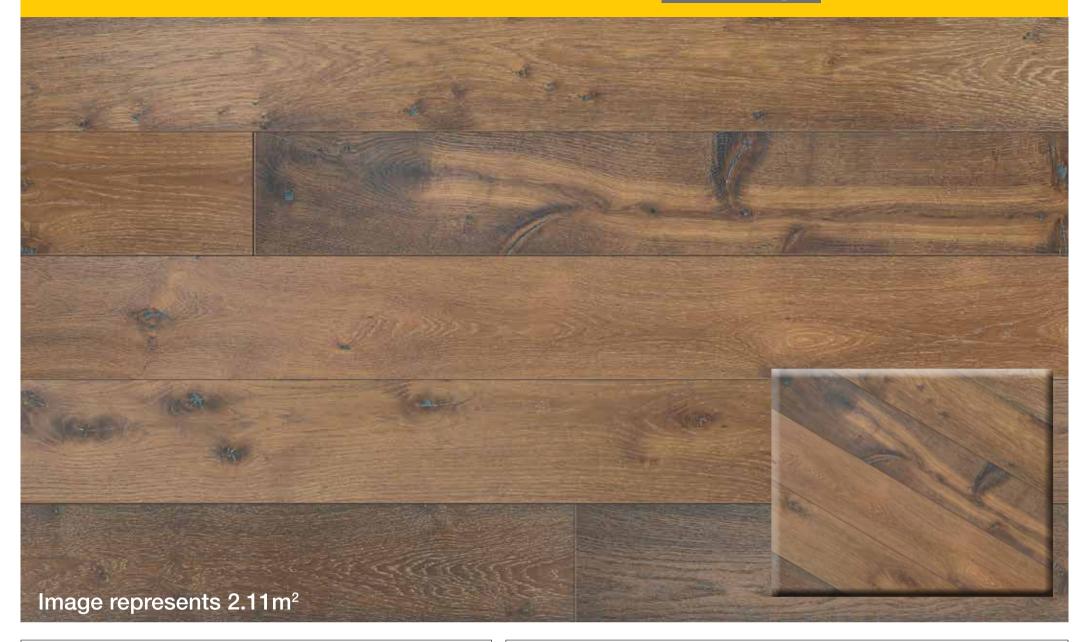

SPECIES:	European Oak			
FINISH:	Rustic, Natural UV Oil			
SIZE:	12.5x190x1820mm (2mm wear layer)			

Colour and grain

Colour:

Heartwood is light brown; some boards may have a pinkish tint or a slight greyish cast. Sapwood is white to cream.

Flooring is stained which evens the colour whilst enhansing the grain and texture.

Grain:

Open, with longer rays than red oak. Occasional crotches, swirls and burls. Plain sawn boards have a plumed or flared grain appearance. Softer grain is removed in the brushing process giving a textured surface.

Variations within species and grades:

Considerable variation among boards in colour and grain texture.

Specification					
Board Dimensions:	12.5mm x 190 x 1820mm (2mm wear layer)				
Grade:	Rustic 'B/C/D' (Black repaired knots & small repaired splits allowed)				
Oak origin:	Mixed EU sources				
Profile:	Uniclic Multifit				
Bevel:	B2 1.2mm 'long edge only'				
Pack Size:	2.075m²				
Planks per pack:	6 Layers 1820mm, up to 30% starter boards (600mm +)				
Construction:	Oak Wear Layer, HDF Core & Larch Back				
Oil / Lacquer:	UV Cured Oil				
Adhesive:	E1				
Guarantee:	25 Years Structural				
Bathroom:	Must never install in this area				
Conservatory:	Yes				
Underfloor heating: Embedded systems only	Yes if installed as a floating floor over underlay incorporating DPM and a maximum contact temp. of 27°C (back of board & sub floor). Electric matting max 150 W/m².				
Maintenance:	Elka Oil maintenance kit				
Installation:	Float over underlay, full stick with Elka flex adhesive				

PREFINISHED	All Species	RUSTIC	A – Grade -	B – Grade 30%	C – Grade 30%	D – Grade 40%	For full grading breakdown visit www.elkaflooring.co.uk
-------------	-------------	--------	----------------	------------------	------------------	------------------	---

INSTALLATION IMPLIES ACCEPTANCE
NO WARRANTY WILL BE OFFERED FOR APPEARANCE
RELATED CLAIMS ONCE THE PRODUCT IS INSTALLED

Note: Real wood flooring is a natural product and is subject to natural variations. Any dissatisfaction on grade quality or definition **must** in all cases be notified to Unilin prior to installation.

Imported and distributed by Unilin Distribution T: 028 3025 0477

